

# BLOC-2

## Acoustics & materials

Certification in progress: ISO 23351-1

### Wooden panels

Biosourced flax insulation  
Recycled PET absorbent  
Optional: Gabriel Tonal recycled fabric

### Double glazed wall

Securit laminated acoustic glass

### Floor

Absorbent carpet in 100% recycled nylon

### Front and rear frame

Solid softwood

## Electrics & electronics

### Control

Dimming & ventilation control  
Radar presence detector

### Ventilation

Unique insufflation / extraction system  
12 fans - Max airflow: 1442.4 m<sup>3</sup>/h - 848.96 CFM

### Éclairage LED

4000K LED lighting - [low consumption]

### Interior connections

2 Power socket [220v 16 A]  
Optional: USB-C 30 W - Fast charging

### Consumption

Min : 2,2 Watts  
Max : 20,5 Watts

## Dimensions


### Pod

H 210 cm X L 201 cm X D 100 cm

### Shelf

H 75cm X L 98 cm X W 60 cm

Weight : 400 kg

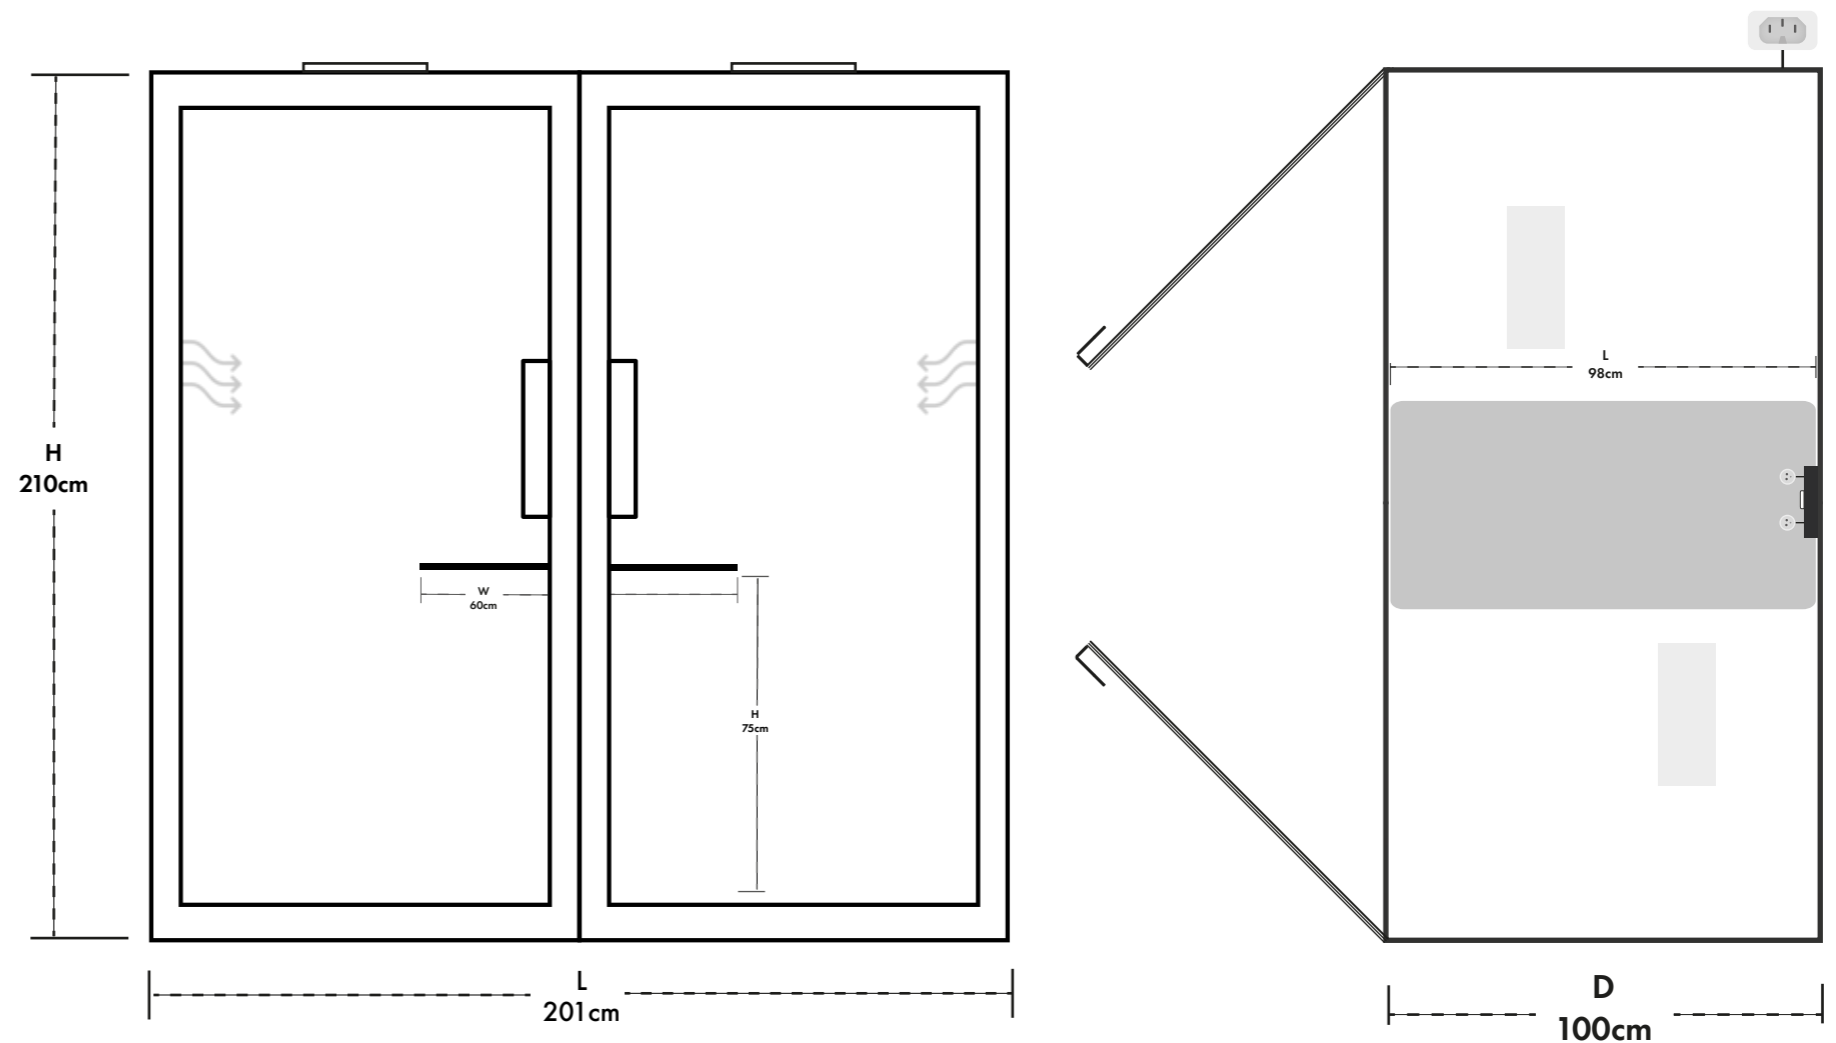

## Logistic

Assembly time: 45 minutes [excluding transport of parts]

Delivery and after-sales service within 48 hours in the Paris region

**3-year warranty**  
**Assembled in Paris**