

Acoustic

Overall sound insulation
 -29,1db* according to ISO 23351-1
 High performance acoustic absorption
 Low reverb time (0,13 s)

Dashboard

H: 18cm / L: 11,8 cm / P: 0,8cm

Features :
 3-level adjustable ventilation
 4-level adjustable brightness
 Collection of usage data
 Sound privacy threshold
 Remote maintenance
 Specifications :
 Touch screen - 7-inch IPS
 ARM architecture - Pine 64
 Operating system : Arche OS - UNIX

Ventilation

Silent (19,2 db)
 Max extraction flow : 961,2 m3/h - 565,98 CFM

Electric

Consumption:
 On (max. power) : 35,8W
 Standby: 7W
 Presence detector and indicator
 Power cable:
 IEC 14 cable included (2 metres)
 On the left side of the pod (customisable)
 Indoor connections:
 Socket outlet (220v 16 A)
 • Type-C USB (3A - 5 V/15 W)
 • Type-A USB (3A - 5 V/15 W)
 Wifi 5
 Ethernet - RJ45 (optional)

Glass walls

Securit laminated acoustic glass (44,2 - 38 R_w dB)
 Glass door with magnetic closure
 Ergonomic metal handle
 LCD Connected privacy filter (optional)
 Consumption : 7 Watts


Logistic

Time for assembly: 2h (excluding parts routing)

Quality control by leet design to guarantee the same acoustics insulation level as in the laboratory.

Dimensions

Weight 512kg - 2,624 m2 on the ground
 Prerequisite: 5cm gap above and behind

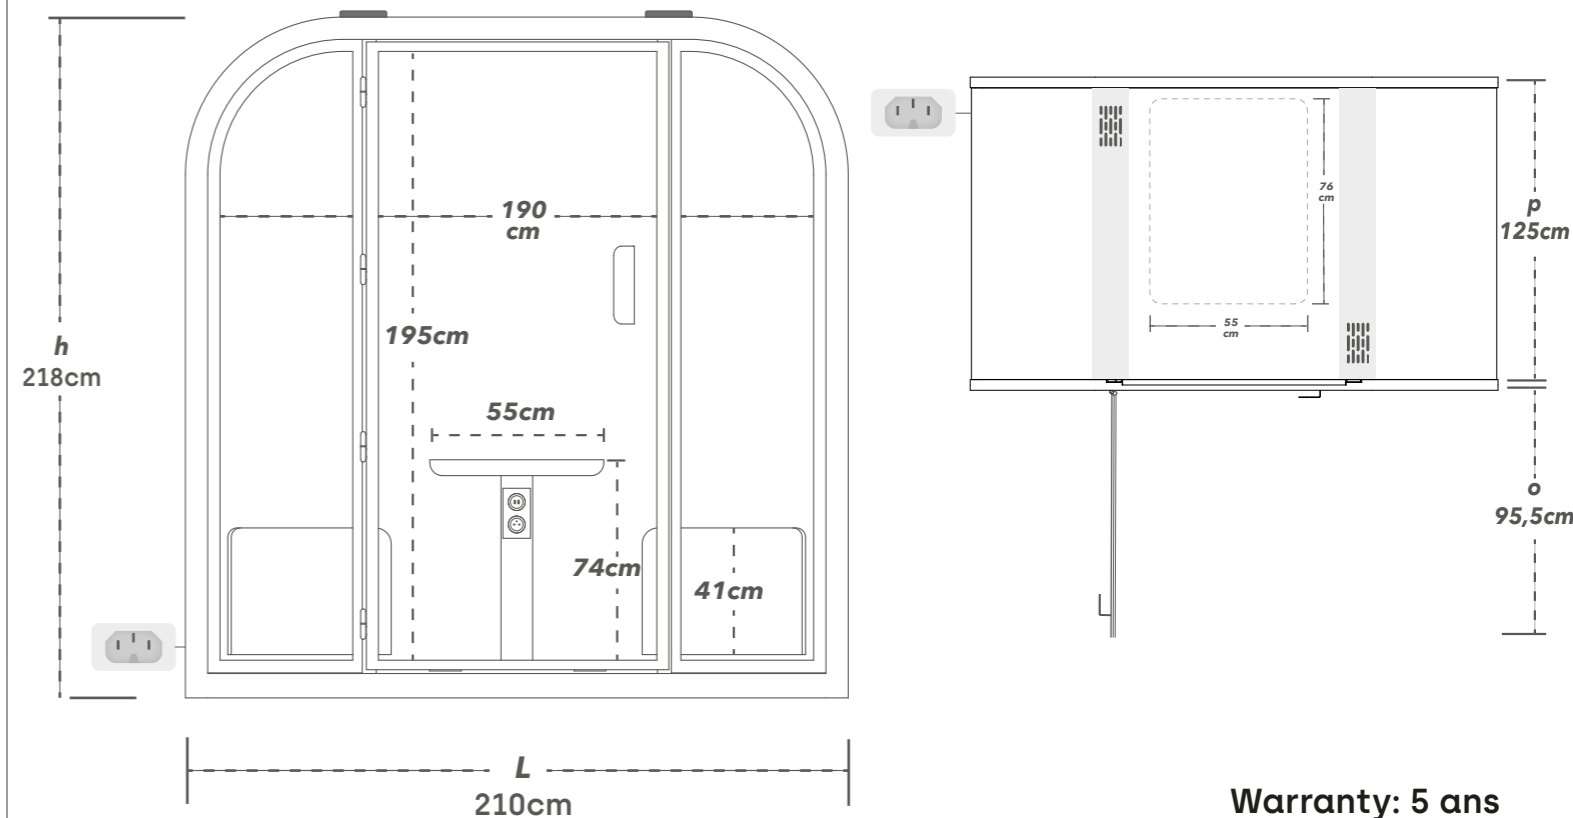

Warranty: 5 ans