

Acoustic

Overall sound insulation
-30,6db* according to ISO 23351-1
High performance acoustic absorption
Low reverb time (0,13 s)

Dashboard

H: 18cm / L: 11,8 cm / P: 0,8cm

Features :
3-level adjustable ventilation
4-level adjustable brightness
Collection of usage data
Sound privacy threshold
Remote maintenance
Specifications :
Touch screen - 7 inch IPS
ARM architecture - Pine 64
Operating system : Arche OS - UNIX

Ventilation

Silent (19,2 db)
Max extraction flow : 360,6 m³/h - 212.24 CFM

Electric

Consumption:
On [max. power]: 19,5W
Standby: 4W
Presence detector and indicator
Power cable :
IEC 14 cable included (2 metres)
On the left side of the pod (customisable)
Indoor connections:
Socket outlet (220v 16 A)
Type-C USB (1,5 A - 5 V/7,5 W)
Wifi 5
Ethernet - RJ45 [optional]

Glass walls

Securit laminated acoustic glass (44,2 - 38 R_w dB)
Glass door with magnetic closure
Ergonomic metal handle
LCD Connected privacy filter [optional]
Consumption : 7 Watts

Logistic


Time for assembly: 30 minutes (excluding parts routing)

Quality control by leet design to guarantee the same acoustics insulation level as in the laboratory.

Dimensions

Weight 298,7 kg - 1,092 m² on the ground

Prerequisite: 5cm gap above and behind

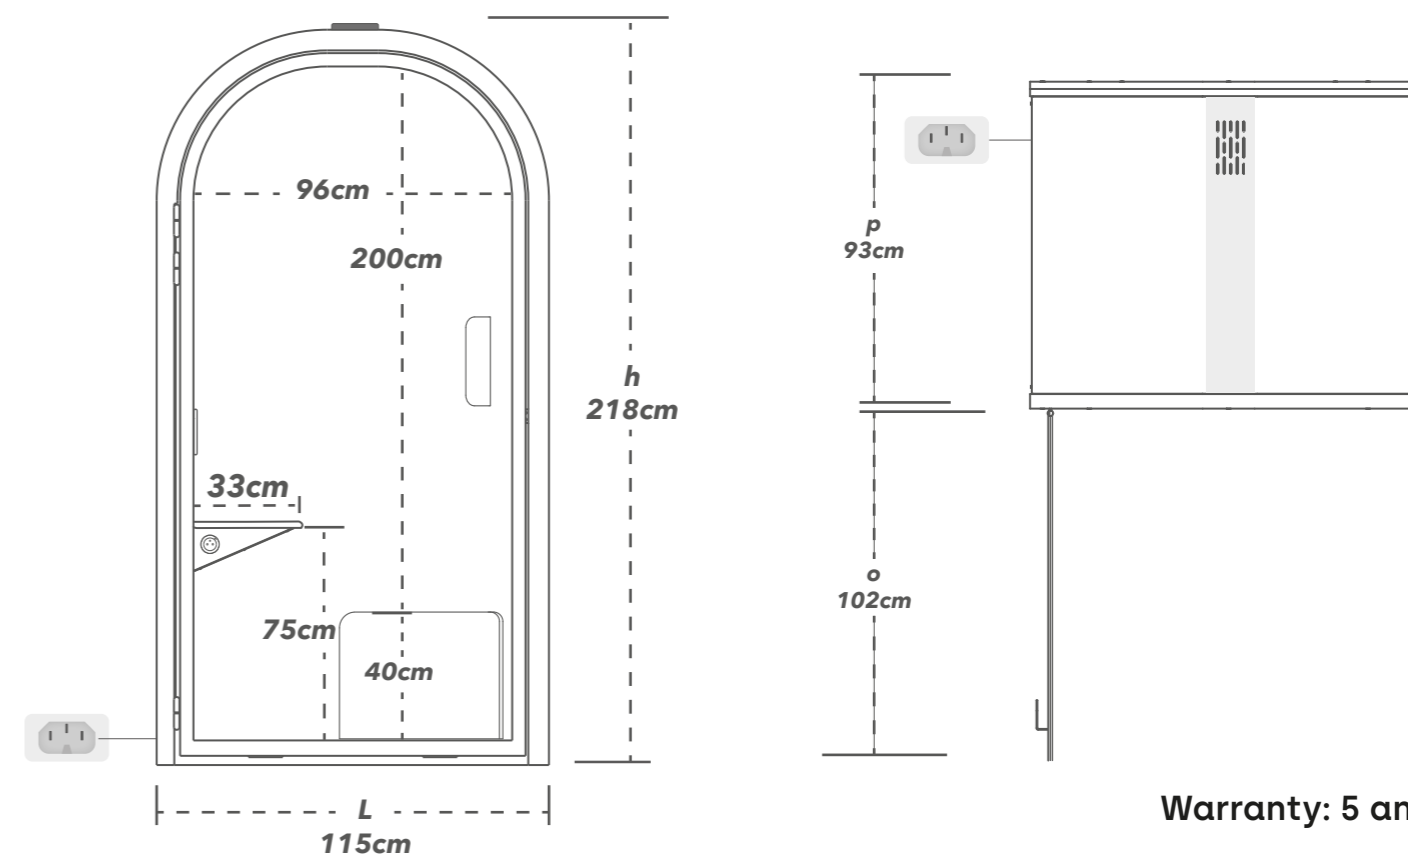

Warranty: 5 ans